

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**


As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04B 7/00</b>	<b>A1</b>	(11) International Publication Number: <b>WO 95/12257</b> (43) International Publication Date: 4 May 1995 (04.05.95)
<p>(21) International Application Number: PCT/US94/10997</p> <p>(22) International Filing Date: 29 September 1994 (29.09.94)</p> <p>(30) Priority Data: 08/144,166 27 October 1993 (27.10.93) US</p> <p>(71) Applicant: MOTOROLA INC. [US/US]; 1303 East Algonquin Road, Schaumburg, IL 60196 (US).</p> <p>(72) Inventors: BATTIN, John, W.; 446 Signal Hill Road, North Barrington, IL 60010 (US). LYNK, Charles, N., Jr.; 1201 Circle Lane, Bedford, TX 76022 (US). LAIRD, Kevin, M.; 5244 Dunson Drive, Haltom City, TX 76148 (US).</p> <p>(74) Agents: PARMELEE, Steven, G. et al.; Motorola, Inc., Intellectual Property Dept./RJW, 1303 East Algonquin Road, Schaumburg, IL 60196 (US).</p>	<p>(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, ES, FI, GB, GE, HU, JP, KE, KG, KP, KR, KZ, LK, LT, LU, LV, MD, MG, MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SI, SK, TJ, TT, UA, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ).</p> <p><b>Published</b> <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>	

(54) Title: APPARATUS AND METHOD FOR ADAPTING A DIGITAL RADIOTELEPHONE SYSTEM TO INCREASED SUBSCRIBER TRAFFIC

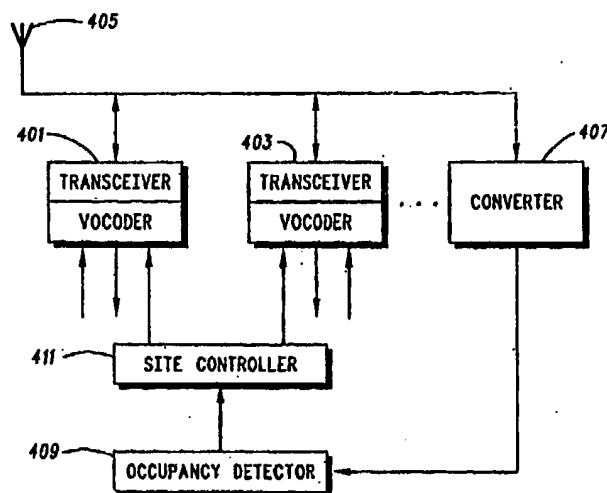

## (57) Abstract

A digital radiotelephone system employs vocoders (401, 403) to convert between analog speech and a digital format suitable for transmission via radio. Under most circumstances, the highest data rate is selected for optimum audio quality. When the system occupancy exceeds a particular threshold, as detected at the fixed site of the system, some or all of the vocoders (401, 403) are instructed to switch to a lower data rate to provide for an increase in the number of communication channels. Further, a portable subscriber unit (103, 111, 113) may autonomously change its vocoder data rate depending upon the charge state of its battery.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

APPARATUS AND METHOD FOR ADAPTING  
A DIGITAL RADIOTELEPHONE SYSTEM TO  
INCREASED SUBSCRIBER TRAFFIC

5

Field of the Invention

10 The technical field of the present invention generally relates to  
radiotelephone systems and more particularly to digital  
radiotelephone systems which can adapt to high subscriber traffic  
loading.

Background of the Invention

15

20 In virtually every radiotelephone system, a large number of  
subscribers are served from a central fixed site which provides  
communication channels to the subscribers as the channels are  
needed and as the subscribers move from place to place. Of course  
in any such system it is likely that the number of subscribers will  
occasionally exceed the number of communication channels  
available. This problem has been addressed in many ways,  
including providing a busy signal to the subscriber (that is, simply  
not providing service) and constructing cellular systems having  
25 the capacity to reduce the sizes of the radio coverage areas (cells)  
and to subsequently place more cells and hence more  
communications channels in a geographic area. Needless to say,  
not providing service is an unacceptable solution while the process  
of cell splitting and redeployment is slow and not responsive to a  
30 dynamic radiotelephone system.

Digital radiotelephone service has been proposed as another  
method of increasing the number of channels available to  
subscribers. Two of the most promising digital methods, time  
division (TD) and code division (CD), offer increased channel  
35 availability by further sharing the physical resources among the

subscribers. Simply stated, analog signals (such as voice) are converted (in a vocoder) to a digital signal using a conversion format having specified sampling frequency and a particular data compression technique. The compressed data is combined with the  
5 time division or code division signal and transmitted, via radio, to the receiver. The receiver demodulates the time division or code division transmitted signal and decompresses and resamples the data in a process complementary to the conversion prior to transmission. This produces a reproduced analog signal at the  
10 receiver.

The radiotelephone service is bi-directional in that the fixed station both transmits and receives vocoded signals and the subscriber unit reciprocally transmits and receives vocoded signals. Compatibility between transmitting units and receiving  
15 units requires that the conversion rates and compression techniques be opposite and equal. Whatever rate is used in the analog to digital processing must be matched in the corresponding digital to analog processing. It should be noted that, in general, the lower the vocoder bit rate, the greater the number of available  
20 communications channels, but the quality of the speech is reduced.

It has been suggested that the vocoding rates be made variable to encode speech signals at rates based upon the characteristics of the speech to be encoded. In order that the optimum quality of speech be transmitted, the highest rate is used  
25 during passages of speech. When the speaker pauses or stops speaking, a variable rate vocoder reduces the rate, thus lowering the average rate per talker, which allows the system to provide more communications channels. See, for example, US Patent Application No. 08/099,881 "Method and Apparatus for  
30 Multiplexing Fixed Length Message Data and Variably Coded Speech" filed on behalf of DeClerck on July 30, 1993 and assigned to the assignee of the present invention.

Even employing the foregoing techniques may not yield a radiotelephone system offering a sufficient number of

communication channels in an efficient manner to accommodate a large subscriber population.

#### Brief Description of the Drawings

5

FIG. 1 is a simplified diagram of a radiotelephone system which may employ the present invention.

FIG. 2 is a block diagram of a CDMA transmitter which may be employed in the present invention.

10 FIG. 3 is a block diagram of a CDMA receiver which may be employed in the present invention.

FIG. 4 is a block diagram of a fixed site illustrating an equipment configuration which may be employed in the present invention.

15 FIG. 5 is a flowchart of the process employed by the site controller of FIG. 4 to control the reduction of vocoder rate.

FIG. 6 is a flowchart of the process employed by the site controller of FIG. 4 to control the increase of vocoder rate.

20 FIG. 7 is a flowchart of an alternative process employed by the site controller of FIG. 4 to control reduction of vocoder rate.

FIG. 8 is a flowchart of an alternative process employed by the site controller of FIG. 4 to control the increase of vocoder rate.

#### Detailed Description of a Preferred Embodiment

25

The use of digital technologies to increase system capacity has offered the system designer the opportunity to digitally compress the message data. As the data rate is reduced, however, the quality of the audio message is compromised. The promise of  
30 better audio quality is realized only when the higher data rates are used, so it is desirable to preferentially use these higher rates. At certain times, busy hour for example, and in certain locations, some congested metropolitan areas for example, the subscriber radiotelephone traffic exceeds the number of communication  
35 channels available. Since reduced data rates occupy less of the

radio spectrum, more subscribers can be served when the data rates are reduced. The subscribers' desire for service is balanced against the reduced audio quality of the lowered data rate. Some subscribers may desire a non-changing audio quality and may, at a higher tariff, be designated a priority subscriber.

A radiotelephone system which may employ the present invention is shown in the diagram of FIG. 1. A radiotelephone system having a radio coverage area 101 is depicted as a hexagonal geographic area served by fixed station 103. Fixed station 103 conventionally includes transceivers, controllers, and telephone interface devices which cooperate to provide two way radio communication to a subscriber unit 105. A large number of subscriber units (not shown), both mobile and portable, are served from the fixed site 103 for the geographic radio coverage area 101. Other radio coverage areas, 107 and 109, may be arranged nearby or adjacent to radio coverage area 101 and may supply radiotelephone service to subscribers in radio coverage areas 107 and 109 from fixed sites 111 and 113, respectively. A preferred embodiment of the present invention employs a code division multiple access (CDMA) digital modulation technique such as that described in EIA/TIA/IS-95, "Mobile Station-Base Station Compatibility Standard for Dual-Mode Wide Band Spread Spectrum Cellular System".

FIG. 2 is a block diagram of a CDMA transmitter which may be employed in the present invention. Signals to be transmitted, such as voice, are input to a vocoder 201 for digital conversion and processing before being transmitted. The output signal from the vocoder 201 is input to an encoder 203, coupled to a mixer 205, and mixed with a radio carrier frequency generated by carrier frequency generator 207. A selected output from mixer 205 is applied to amplifier 209 for subsequent transmission. Vocoder 201 and encoder 203 are under the control of resource controller 211. Resource controller 211 may be a general purpose computer having an associated memory 213. A clock 215 provides a clock signal output to the encoder 203 and is dependent upon a clock speed loaded into it from memory 213, as instructed by resource control 211. The

code key 217 is a buffer containing a code loaded from memory 213 as instructed by resource control 211. The code key is, conventionally, a pseudorandom number used to generate a repeating sequence of digital numbers to encode the output of vocoder 201. The carrier frequency generator 207 is also programmable to a frequency determined by a value loaded from memory 213. Thus the encoder 203 together with an input from code key 217 provides a pseudorandom number by which a spread spectrum signal may be generated from an input from the vocoder 201 or the resource controller 211. A set of frequencies defining communication resources exists within a frequency table in memory 213. This frequency table may be created upon startup depending upon an allocated frequency spectrum and bandwidth defined for the system in which the transmitter is operating. Since different, non-interfering spread spectrum signals may be transmitted on the same frequency but under different code keys, a number of communication channels are available on the same frequency without mutual interference.

Similar CDMA transmitters are found in both the fixed site equipment and the subscriber equipment. In the preferred embodiment, the subscriber equipment may include a parameter detector 219 which is typically used to detect battery charge conditions and report these conditions to the resource control 211.

A code division multiple access (CDMA) receiver, which may be used in the subscriber equipment of the present invention, is shown in block diagram form in FIG. 3. A carrier frequency generator 301 provides a radio frequency signal to mixer 303 so that received RF signals may be converted to a convenient frequency for processing by decoder 305. In a process reversing that of the transmitter of FIG. 2, a pseudorandom number generator of decoder 305, in conjunction with clock 307 and code key buffer 309, extracts the data produced by vocoder 201 and provides this data to vocoder 311. Synchronization to the encoding pseudorandom number and specific carrier frequency are accomplished in



conventional fashion by controller 313 and its associated memory 315.

Similar receivers may be found at the fixed site 103 and a simplified block diagram of the arrangement of equipment at the fixed site is shown in FIG. 4. Transceivers and vocoders are shown as blocks 401 and 403. These transceivers, along with others, are coupled to an antenna system 405 for transmission and reception of signals to and from the radio coverage area. Also coupled to antenna system 405 is a signal converter 407 which filters and couples the entire bandwidth of radio frequency utilized by all of the transceivers operating at the fixed site. Output of the converter 407 is coupled to a spectrum occupancy detector 409 for determination of the number of subscriber units currently in service and transmitting signals to the fixed site. In the preferred embodiment, the spectrum occupancy detector 409 is an energy amplitude detector providing an output signal which is proportional to the combined received signals in the occupied bandwidth of the fixed site. This signal is output to site controller 411 which, among its other duties, compares the signal output from occupancy detector 409 to a threshold value corresponding to a known number of subscriber units representing a system operator-established percentage of full channel capacity of the fixed site. Once this threshold is crossed, the site controller 411 provides one or more output signals to the vocoders of transceivers 401 and/or the vocoder of the transceiver 403 instructing the selected vocoder to reduce its sampling rate. A corresponding message is transmitted to the controller of the subscriber unit communicating with the selected transceiver instructing the subscriber unit vocoder to reciprocally operate at a rate corresponding to the rate of the vocoder at the fixed site.

It is a feature of the present invention that the data rate of the fixed vocoder and its associated subscriber unit vocoder be adjusted in accordance with the number of subscriber units obtaining service from the fixed site in its radio coverage area. This is accomplished in accordance with the process shown in the flow chart of FIG. 5.

The site controller 411 measures the occupancy detector 409 output signal level at 501 and determines whether this level exceeds the occupancy threshold set for this fixed site at 503. If the threshold is not exceeded, the site controller 411 returns to its other tasks  
5 including a periodic remeasurement of the occupancy detector level. If the threshold is exceeded, a list of low priority subscriber units, maintained at the fixed site, is searched at 505 and those presently obtaining service are identified. A determination is made, at 507, whether all the low priority subscribers currently having service  
10 have their fixed site and subscriber unit vocoders set to the low data rate. If there remain low priority subscribers having vocoder rates at the high data rate, the identified low priority subscriber, its serving transceiver, and the associated vocoders are identified at 509. The associated vocoders are then commanded to reduce their  
15 data rate at 511. If all of the low priority subscribers currently with service are found to be at the low data rate at 507, then all vocoders operating at this fixed site are commanded to the low data rate at 513.

The complementary reset process for returning the system  
20 vocoding data rate to its normal high rate is shown in FIG. 6. The site controller 411 accepts the signal from occupancy detector 409 and measures the occupancy detector level at 601. If the detector level is below a reset occupancy threshold (a threshold below that required to switch from the high rate of sampling to provide  
25 hysteresis) at 603. A detector level which is not below the reset occupancy threshold causes the site controller process to return to its other tasks. A detector level below the reset occupancy threshold causes the site controller 411 to search the list of high priority subscriber units presently with service at 605. If not all of the high  
30 priority subscriber units have been returned to the high data rate as determined at 607, a correlation is made between high priority subscriber units and their serving transceivers at 609. The associated vocoders are then commanded to increase their data rate at 611. If all of the high priority subscribers have been returned to  
35 the high data rate as determined at 607, then all vocoders are

commanded to the high data rate at 613 and the site controller 411 returns to its normal schedule of activity.

In an alternative embodiment, subscribers may be commanded to the low data rate incrementally. As shown in FIG. 7, when the determination is made that not all low priority subscribers are at the low data rate, at 507, a random selection of a number,  $M$ , of subscribers (which could be  $M=1$ ) is made, at 703. These selected low priority subscribers are correlated with the serving transceivers at 705 and the associated vocoders are  
10 commanded to the low data rate, at 509.

If all the low priority subscribers are at the low rate, a search of the subscriber list is made for those high priority subscribers presently receiving service, at 707. A determination is made, at 709, whether all the high priority subscribers are at the low data rate. If  
15 not all are, a random selection of a number,  $K$ , of high priority high data rate subscribers (which could mean  $K=1$  and/or  $M \neq K$ ) is made at 711. These selected subscribers are correlated with their serving transceivers at 713 and the associated vocoders are commanded to the low data rate at 715.

To incrementally return to the high data rate service when the system subscriber loading allows, the alternative embodiment process of FIG. 8 is followed. If the determination is made, at 607, that not all of the high priority subscribers have been returned to the high rate, a random selection of a number,  $N$ , of high priority  
20 subscribers (where  $N=1$  is a possibility) using the low rate is made at 803. These selected subscribers are correlated with their serving transceivers, at 805, and the associated vocoders are commanded to the high data rate at 611.

If all of the high priority subscribers are at the high data rate, a search is made of the subscriber list for low priority subscribers presently with service from the system, at 807. A determination is made, at 809, whether some low priority subscribers remain at the low data rate and, if so, a random selection of a number,  $L$ , of such subscribers is made, at 811. The  
30 number of subscribers may be  $L=1$  and it is possible that  $L \neq M$ . The  
35

selected low priority subscribers are correlated with their serving fixed transceiver, at 813, and the associated vocoders are commanded to the high data rate at 815.

5 In those systems having subscriber priority, additional levels of priority may be assigned such that certain selected subscriber vocoders may not be commanded to a low data rate while other selected subscriber vocoders may not be commanded to a high data rate. For example, subscribers using the radiotelephone system for communications relating to public safety may always require the  
10 highest audio quality. On the other hand, some subscribers may only require minimum communications capability and are willing to accept somewhat lower audio quality for a lower subscriber tariff. A system implementing these classes of priority will have an exemption to the vocoder rate change command instructions of  
15 FIGS. 5-8.

The subscriber unit, in the preferred embodiment, also has the capability of selecting a vocoder rate depending upon certain operating parameters of the subscriber unit. This feature is especially useful in a portable subscriber unit where battery life is  
20 important but other portable parameters may also be used to trigger a change of vocoder rate. Modification of device operating characteristics in accordance with a detected battery type has been shown in US Patent No. 5,164,652 and detection of battery state of charge has been shown in US Patent No. 5,185,566, both of which  
25 have been assigned to the assignee of the present invention. It is well known that higher vocoder data rates consume more power than lower rates. To prolong battery life, a battery parameter detector dynamically determines the remaining charge in the battery. When a threshold of low charge is crossed, the parameter  
30 detector 219 of the subscriber unit supplies a signal to the resource control 211. The resource control 211 prepares and sends a control message to the fixed site corresponding vocoder to reduce the data rate, and the resource control 211 commands vocoder 201 of the subscriber unit to reduce its data rate. The subscriber using the

portable subscriber unit is given extended battery life at the expense of a reduced quality of vocoded audio.

Variable rate vocoders, which may be employed in the present invention, have been described in IS-96 generated by the  
5 Telecommunication Industry Association (TIA) TR-45.5 committee standards body. The transmitting vocoder takes voice samples and generates an encoded speech packet for transmission to the receiving vocoder. The receiving vocoder decodes the received speech packet into voice samples. The vocoder of the present  
10 invention uses a code excited linear predictive (CELP) coding algorithm. This technique uses a random codebook to vector quantize the residual signal during an analysis by synthesis method. The vocoder uses a variable output data rate based upon system channel loading. In operation, a vector is taken from a  
15 codebook of random Gaussian vectors (for rate 1/8, a random vector is generated). This vector is multiplied by a gain term and then filtered by the long term pitch filter whose characteristics are governed by the pitch parameters. The output is filtered by the format synthesis filter, also called the linear predictive coding filter,  
20 to produce a speech signal. The speech signal is also filtered by the adaptive postfilter. The encoding process samples the input speech at 8KHz. This sampled speech is broken down into 20 msec. of vocoder frames consisting of 160 samples. The linear predictive coding filter coefficients are updated once per frame regardless of  
25 the data rate selected. The number of bits used to encode the linear predictive encoding parameters is a function of the selected data rate. Within each frame, the pitch parameters are updated a varying number of times where the number of pitch parameter updates is also a function of the selected data rate. Similarly, the  
30 codebook parameters are updated a varying number of times where the number of updates is a function of the selected data rate.

Parameter		Rate 1	Rate 1/2	Rate 1/4	Rate 1/8
5	Linear Predictive Coding (LPC) updates per frame	1	1	1	1
	Samples per LPC update	160 (20msec)	160 (20msec)	160 (20msec)	160 (20msec)
	Bits per LPC update	40	20	10	10
10	Pitch updates (subframes) per frame	4	2	1	0
	Samples per pitch sub-frame	40 (5msec)	80 (10msec)	160 (20msec)	-
	Codebook updates (sub-frames) per frame	8	4	2	1
15	Samples per codebook subframe	20 (2.5msec)	40 (5msec)	80 (10msec)	160 (20msec)
	Bits per codebook update	10	10	10	6 pseudo random

TABLE I

Table I describes the various parameters used for each rate. The number in the bits per LPC update block of Table I is the number of bits used at that particular rate to encode the LPC coefficients. Each pitch block corresponds to a pitch update within each frame, and the number in each pitch block corresponds to the number of bits used to encode the updated pitch parameters. For example, at rate 1, the pitch parameters are updated 4 times, once for each quarter of the speech frame, each time using 10 bits to encode the new pitch parameters. This is done a varying number of times for the other rates as shown. Each codebook updates block corresponds to a codebook update within each frame and the number in each codebook block corresponds to the number of bits used to encode the updated codebook parameters. For example, at rate 1, the codebook parameters are updated 8 times, once for each eighth of the speech frame, each time using 10 bits to encode the parameters. The number of updates decreases as the rate decreases.

We Claim:

## Claims:

1. A digital radiotelephone system including a fixed station  
5 having a radio transceiver and a first vocoder to convert a first  
analog signal to a digital signal at a first predetermined data rate,  
for transmitting to and receiving from a radio coverage area to  
provide service to a plurality of subscriber units within the radio  
coverage area, each subscriber unit employing a second vocoder to  
10 convert a second analog signal to a digital signal at the first  
predetermined data rate, comprising:

a system occupancy detector, coupled to the radio transceiver,  
which provides an output signal related to a number of the  
plurality of subscriber units actively receiving service from the  
15 digital radiotelephone system in the radio coverage area; and

a threshold detector which monitors said output signal and  
generates an instruction to at least one of the first and second  
vocoders to change from the first predetermined data rate to a  
second predetermined data rate.

20

2. A digital radiotelephone system in accordance with claim 1  
further comprising a transmitter which conveys a signal from  
said threshold detector to the second vocoder via the fixed station.

25 3. A digital radiotelephone system in accordance with claim 1  
wherein said threshold detector further comprises a first  
threshold which, when exceeded by said output signal, generates  
said instruction to said at least one of said first and second  
vocoders to reduce said first predetermined data rate to said  
30 second predetermined data rate.

4. A subscriber unit for a digital radiotelephone system  
having a fixed station with at least one radio transceiver and a  
first vocoder to convert a first analog signal to a digital signal at a  
35 first predetermined data rate to provide service to a plurality of

subscriber units within a radio coverage area of the fixed station, each of the plurality of subscriber units employing a second vocoder to convert a second analog signal to a digital signal at the first predetermined data rate, the subscriber unit comprising:

- 5       an operating parameter detector, whereby an operating characteristic of the subscriber unit is monitored and a signal generated when a predetermined threshold is crossed; and  
      a resource controller which receives said signal from said operating parameter detector and which generates an instruction  
10       to at least one of the first and second vocoders to change from the first predetermined data rate to a second predetermined data rate.

5. A subscriber unit in accordance with claim 4 wherein said operating parameter detector further comprises a battery state of  
15       charge detector.

6. A digital radiotelephone system including a fixed station, having a radio transceiver and a first vocoder to convert a first analog signal to a digital signal at a first predetermined data rate,  
20       for transmitting to and receiving from a radio coverage area to provide service to a plurality of subscriber units within the radio coverage area, each subscriber unit employing a second vocoder to convert a second analog signal to a digital signal at the first predetermined data rate, comprising:

- 25       a first group of subscriber units predeterminedly assigned a priority level;  
      a system occupancy detector, coupled to the radio transceiver, which provides an output signal related to a number of the plurality of subscriber units actively receiving service from the  
30       digital radiotelephone system in the radio coverage area;  
      a subscriber priority list and list scanner which selects said first group of subscriber units; and  
      a threshold detector which monitors said output signal and generates an instruction to at least one of the first and second  
35       vocoders of a selected first priority subscriber unit to change from



the first predetermined data rate to a second predetermined data rate.

5       7. A method of adaptation of a digital radiotelephone system to increased subscriber traffic, the digital radiotelephone system including a fixed station having a radio transceiver and a first vocoder to convert a first analog signal to a digital signal at a first predetermined data rate, for transmitting to and receiving from a radio coverage area to provide service to a plurality of subscriber  
10       units within the radio coverage area, each subscriber unit employing a second vocoder to convert a second analog signal to a digital signal at the first predetermined data rate, the method comprising the steps of:

15       detecting spectrum occupancy at the radio transceiver and providing an output signal related to a number of the plurality of subscriber units actively receiving service from the digital radiotelephone system in the radio coverage area; and

20       generating an instruction, in response to said output signal, to at least one of the first and second vocoders to change from the first predetermined data rate to a second predetermined data rate.

25       8. A method in accordance with the method of claim 7 further comprising the step of generating said instruction to said at least one of said first and second vocoders to reduce said first predetermined data rate to said second predetermined data rate when said output signal exceeds a first threshold.

30       9. A method in accordance with the method of claim 8 further comprising the step of generating an instruction to said at least one of said first and second vocoders to increase a data rate from said second predetermined data rate to said first predetermined data rate when said output signal crosses a second threshold.

35       10. A method of adaptation of a subscriber unit employed in a digital radiotelephone system having a fixed station with at least



one radio transceiver and a first vocoder to convert a first analog signal to a digital signal at a first predetermined data rate, the fixed station providing service to a plurality of subscriber units within a radio coverage area of the fixed station, each of the

5 plurality of subscriber units employing a second vocoder to convert a second analog signal to a digital signal at the first predetermined data rate, the method comprising the steps of:

detecting an operating parameter of the subscriber unit, whereby an operating characteristic is monitored and a signal

10 generated when a predetermined threshold is crossed; and

generating, in response to said signal, an instruction to at least one of the first and second vocoders to change from the first predetermined data rate to a second predetermined data rate.

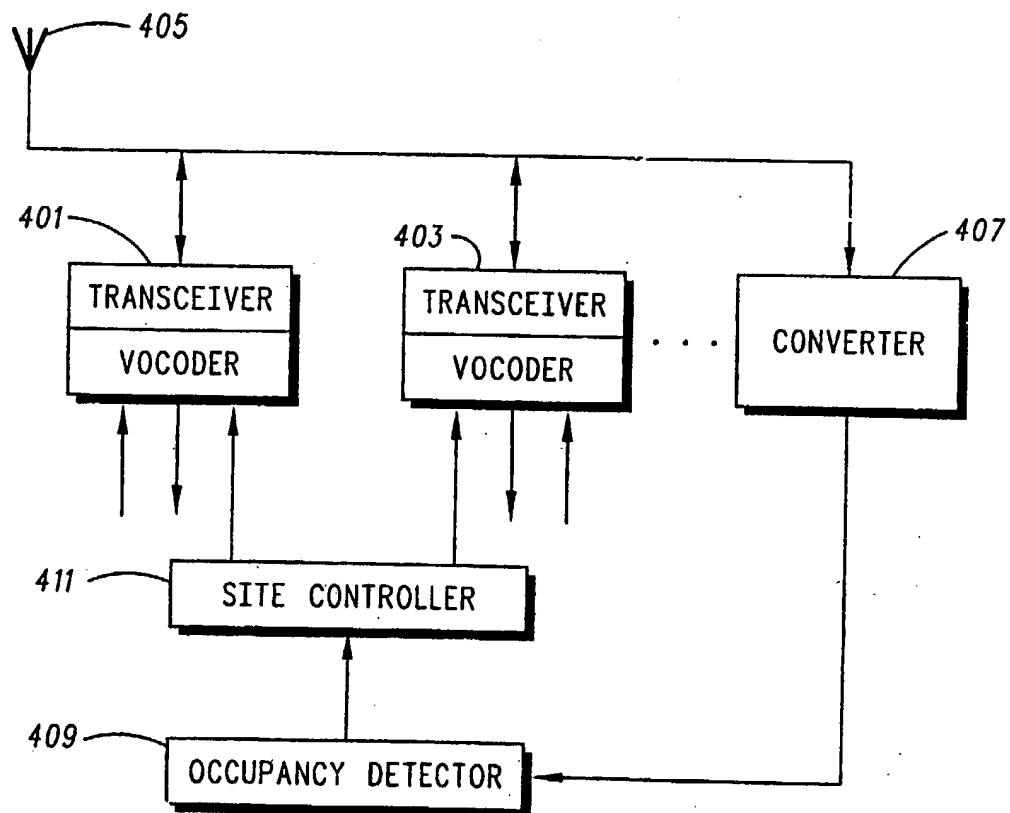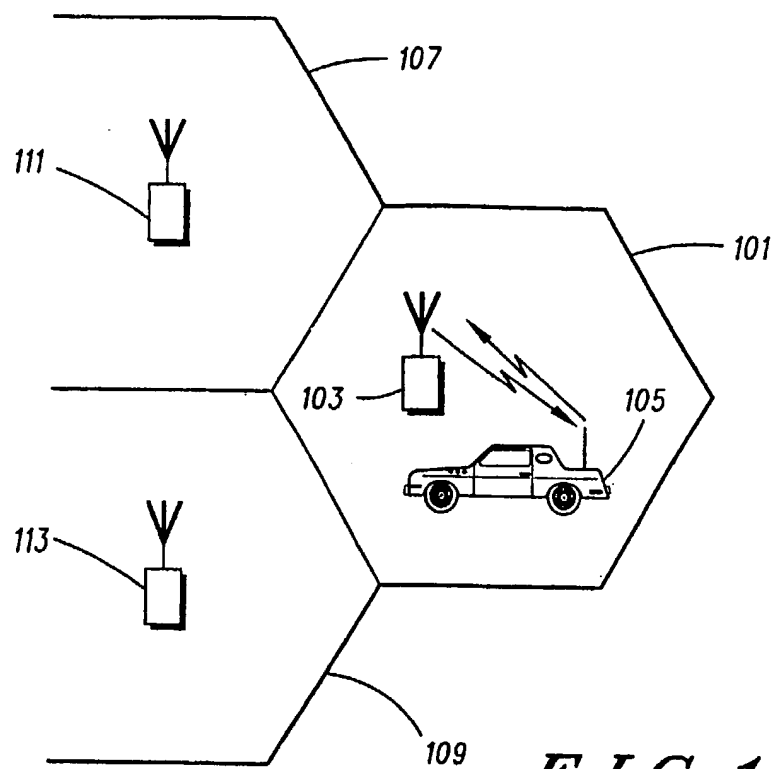

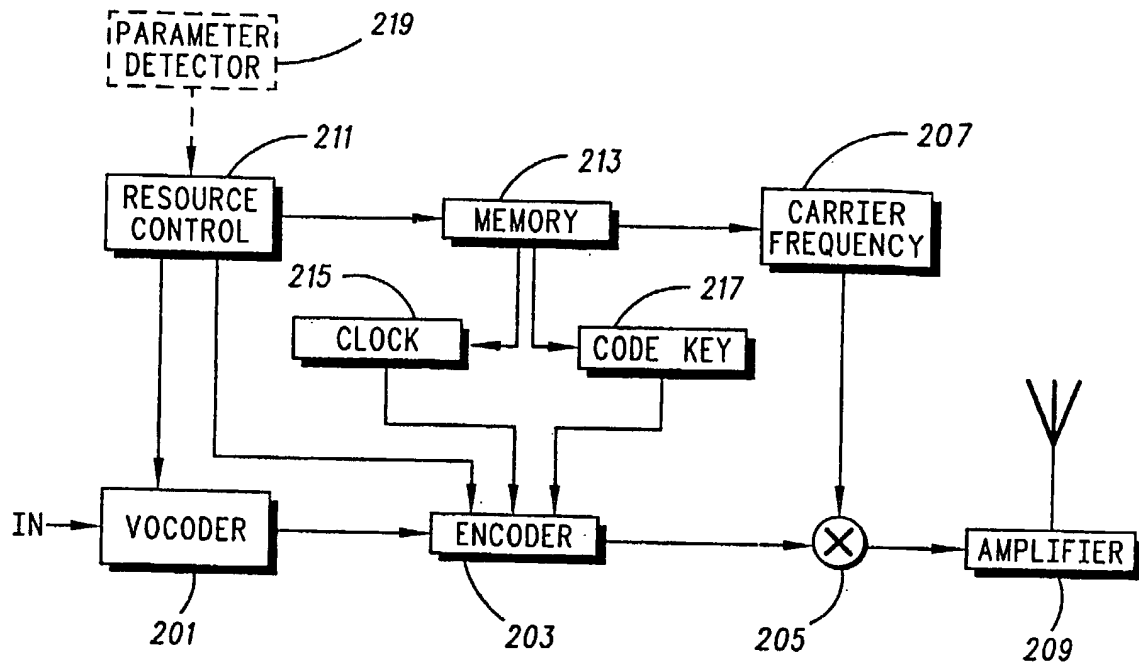


FIG. 2

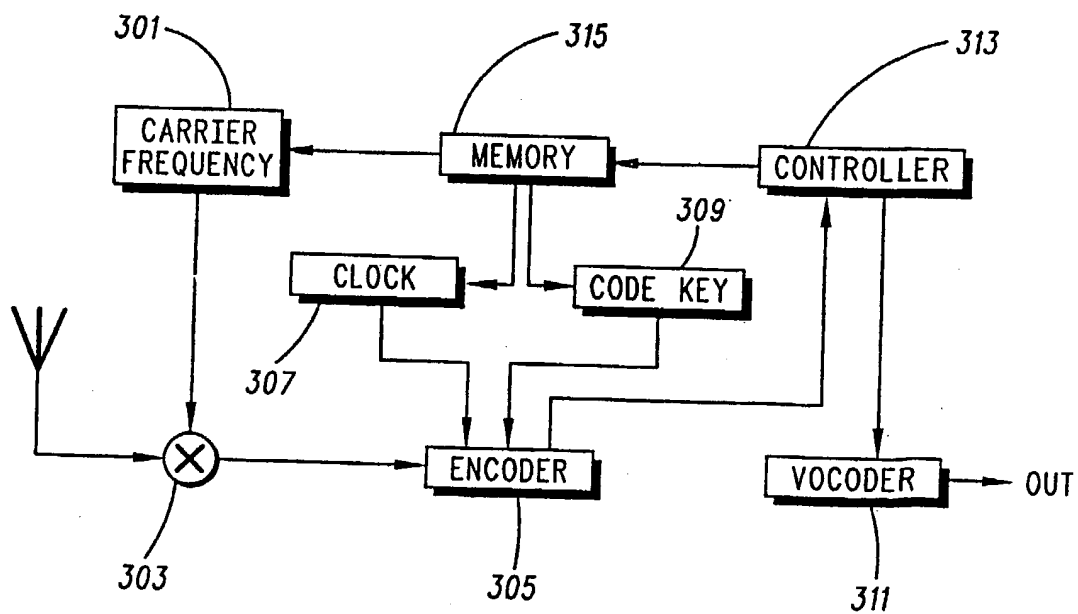
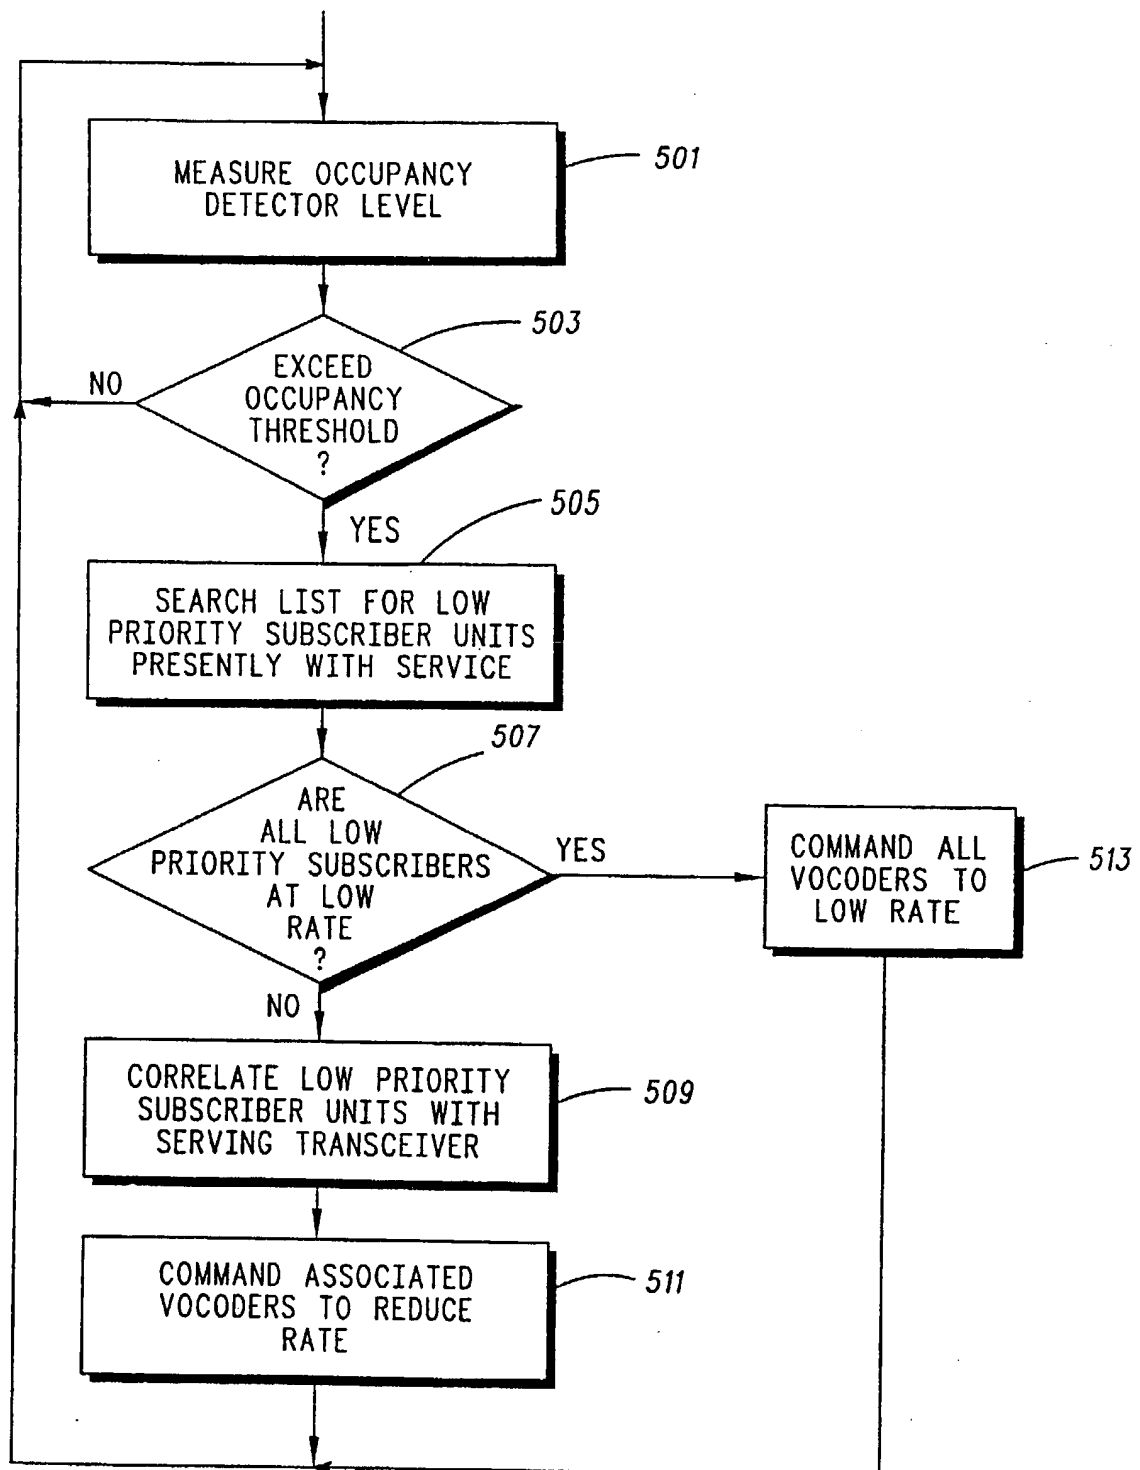


FIG. 3

*FIG. 5*


**FIG. 6**

FIG. 7





FIG. 8



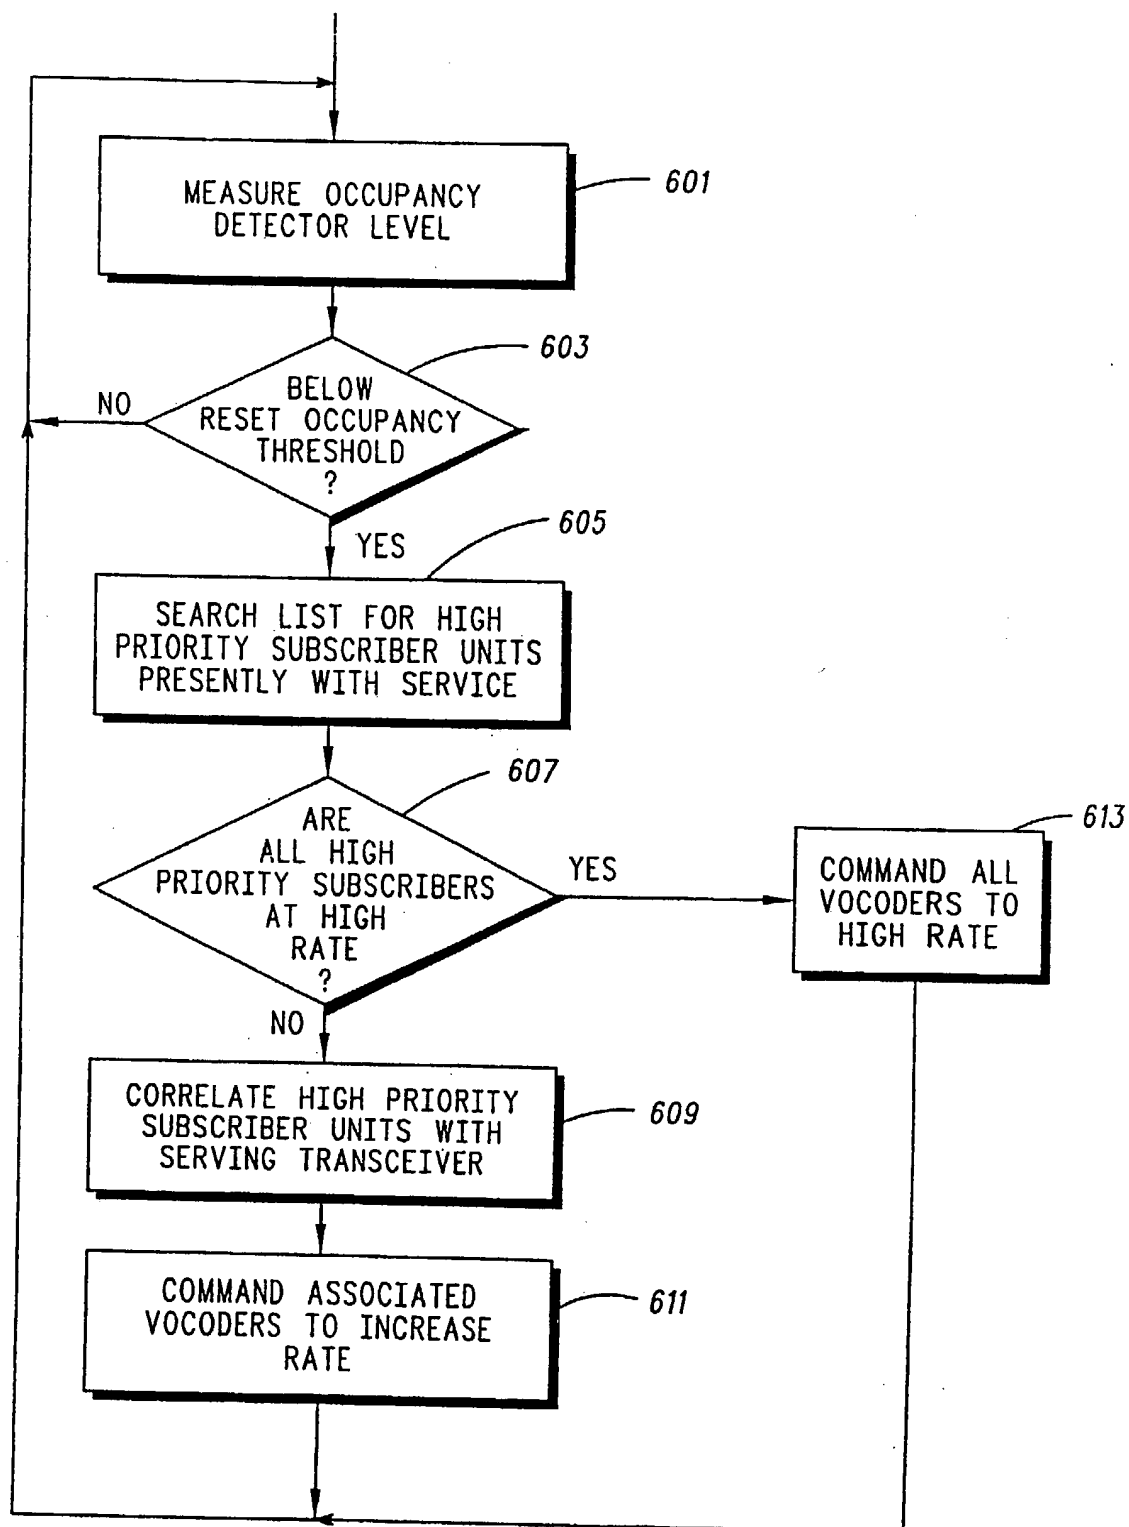

## INTERNATIONAL SEARCH REPORT

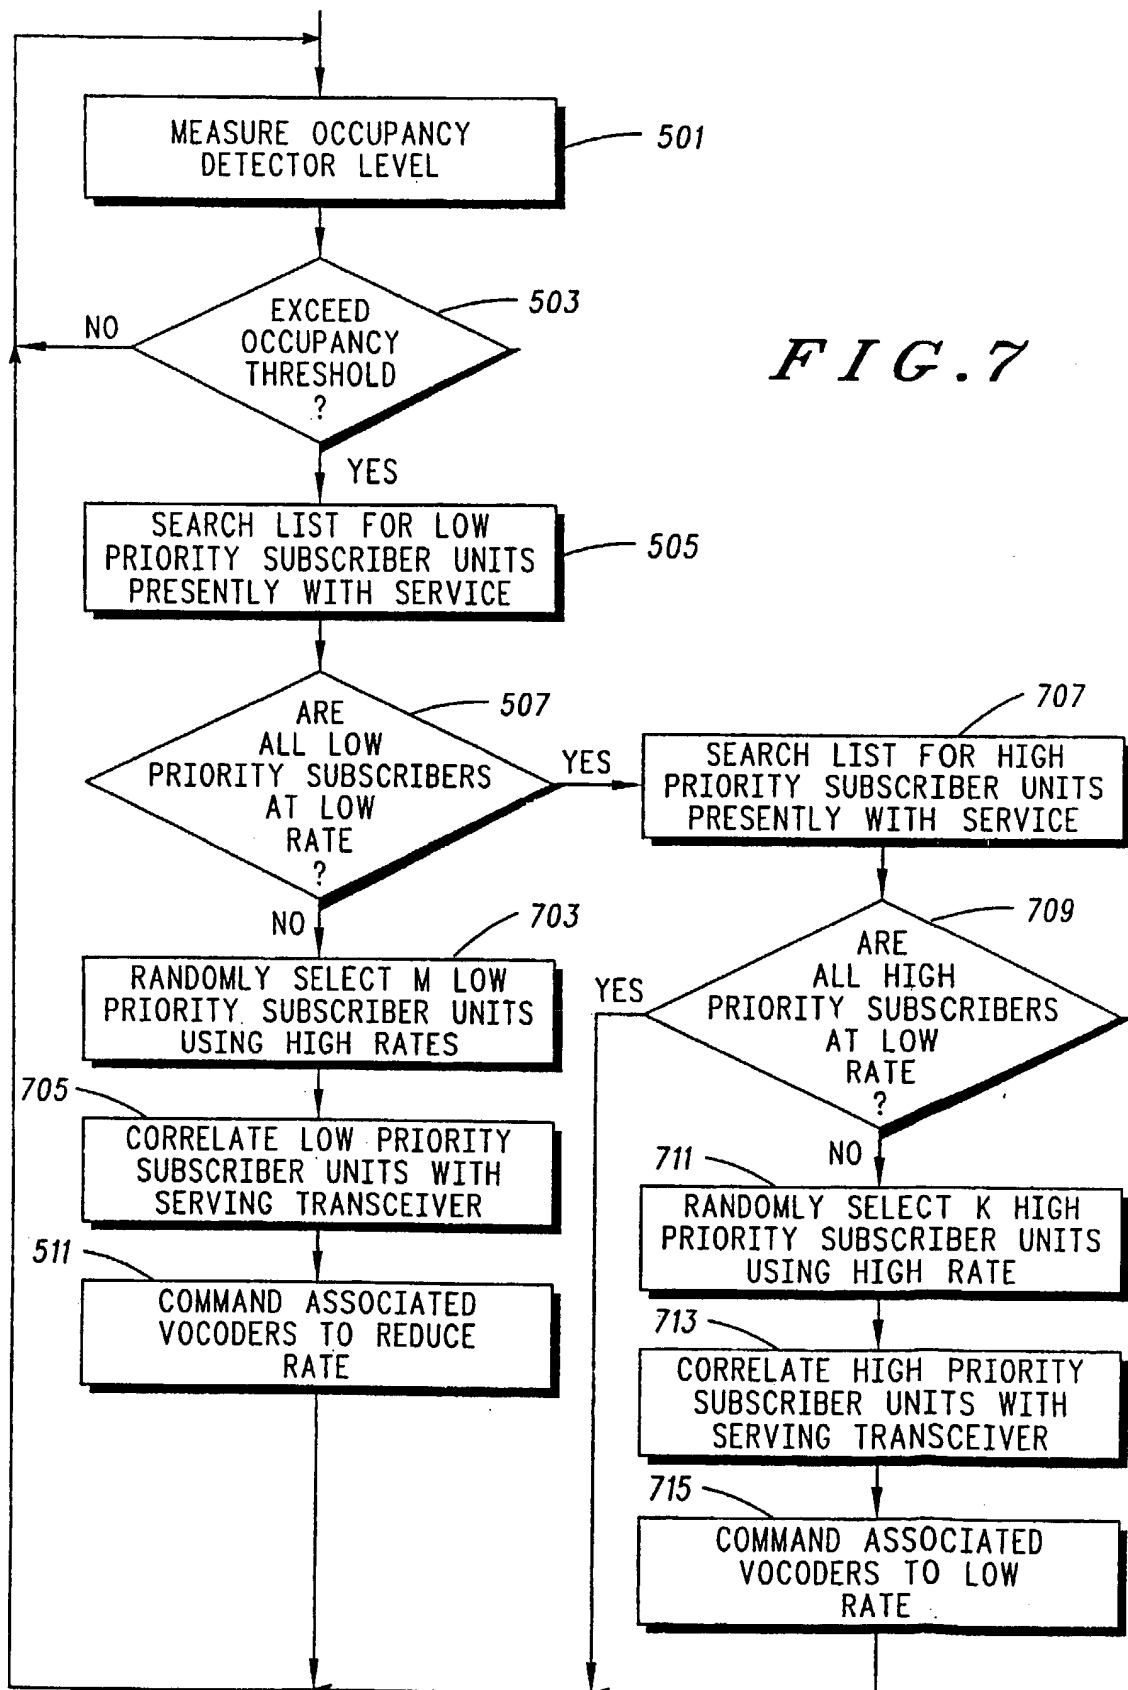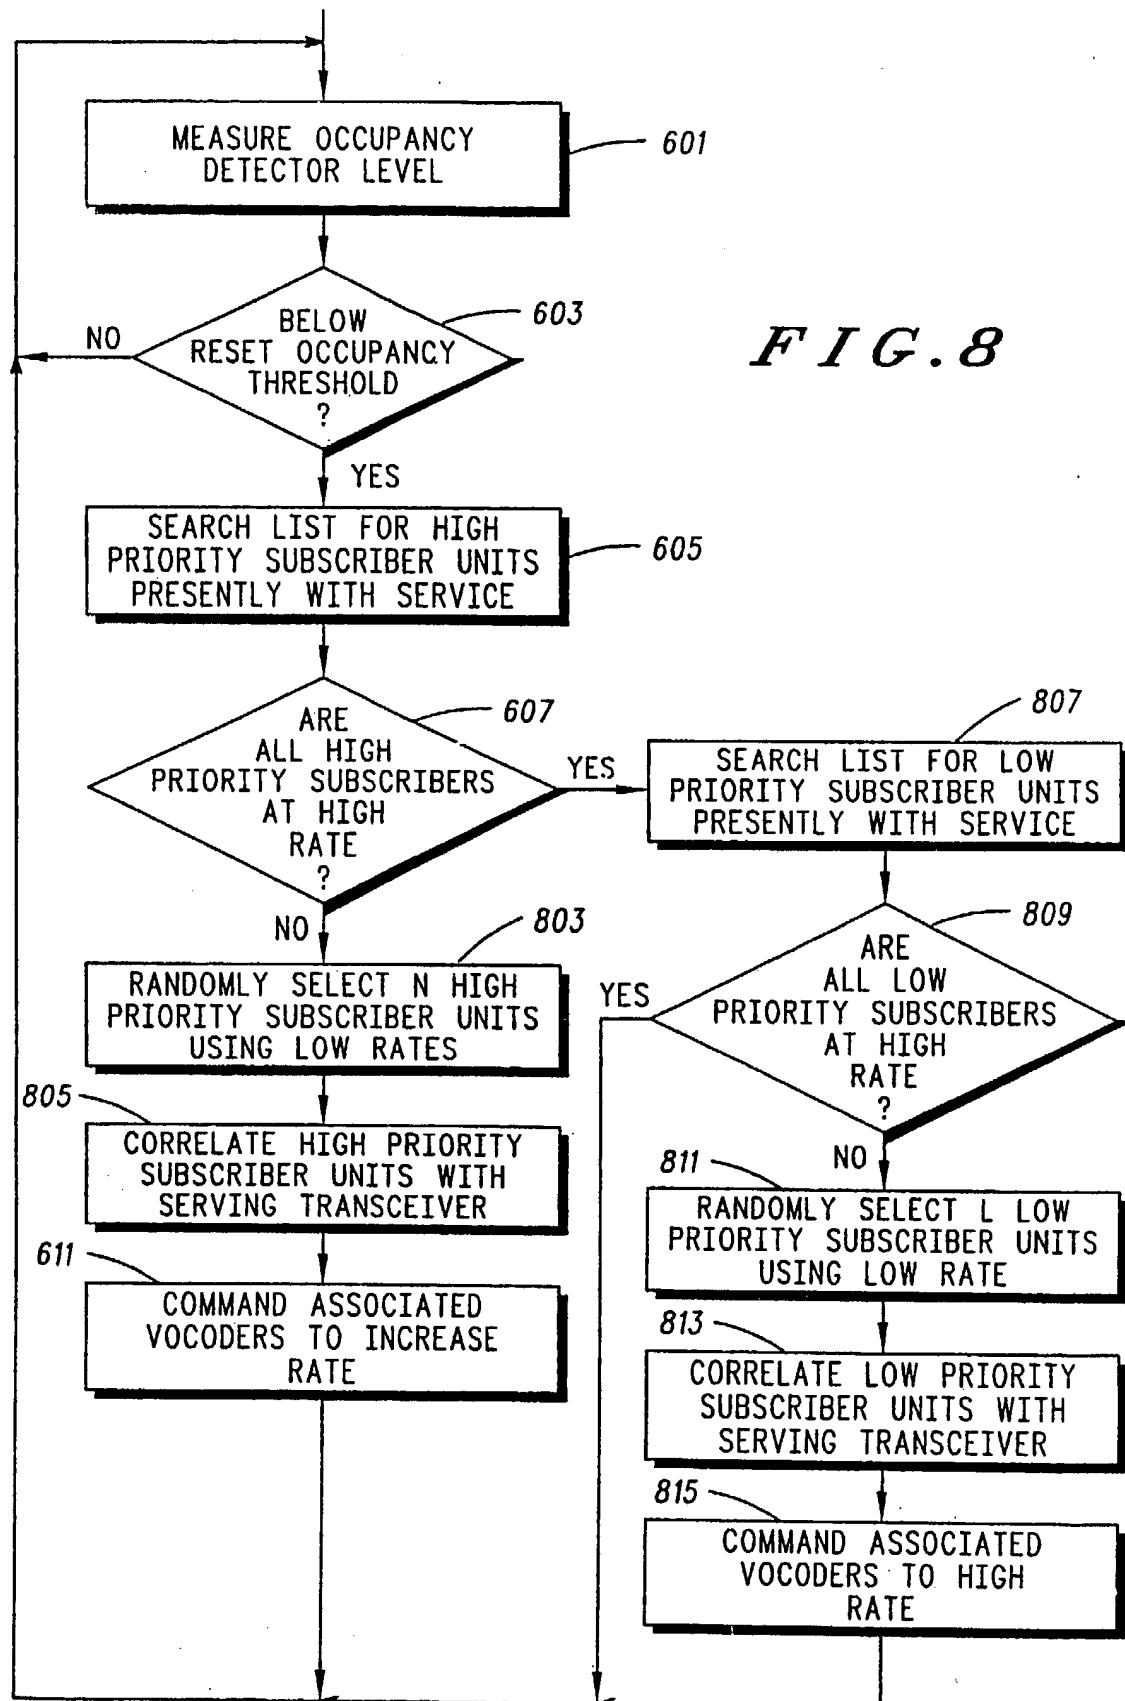International application No.  
PCT/US94/10997**A. CLASSIFICATION OF SUBJECT MATTER**

IPC(6) : H04B 7/00

US CL : 455/54.1

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 455/54.1, 33.1, 34.1, 34.2, 38.3, 63, 72; 379/59; 375/8; 370/84, 94.1

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

APS

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US, A, 5,203,012 (PATSIOKAS ET AL) 13 April 1993, figure 1 and 5.	1-3, 7-10
Y	US, A, 5,115,429 (HLUCHYJ ET AL) 19 May 1992, col. 3, lines 61-66, figure 2.	1-3, 7-10
Y,P	US, A, 5,305,468 (BRUCKERT ET AL) 19 April 1994, figures 6-7.	4-5

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be part of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"G" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

06 DECEMBER 1994

Date of mailing of the international search report

13 MAR 1995

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

Mary M. Lin

Telephone No. (703) 308-6808